


NATIONAL TIME double face clocks are available in several dial sizes and will compliment any architectural treatment. Each clock is equipped with an all-metal case, convex glass crystal, and white polystyrene dial having black markings and hands. Sway-proof hanger plates are furnished that securely hold the clock to the wall. Cases are attractively finished in Powder Gray enamel. Other finishes are available upon request. Refer to Bulletin C- 323 for classic dial styles. National Time offers a complete line of Electromatic Clock Systems, Quartz Battery Operated Clocks, Dual Motor and high-tech Rotary Drive Clock Systems to satisfy any specification.

**Electromatic Clock Systems** clocks are individually self regulated every hour and 12 hours by a master clock, synchronizing scattered clocks. Each clock uses one motor and a reset coil device. Manual setting stems are provided for local control. Operating voltages can be 115VAC or 24VAC.

**Dual Motor Clock System** is a group resetting system using a second motor for corrections where all clocks advance together until either automatically or manually stopped. Series No. 970 reset panels are available to operate up to 4 clocks. Operating voltages can be 120VAC or 24VAC.

Refer to Bulletin C-332 for **Rotary Drive** clocks.

UL Listed models available

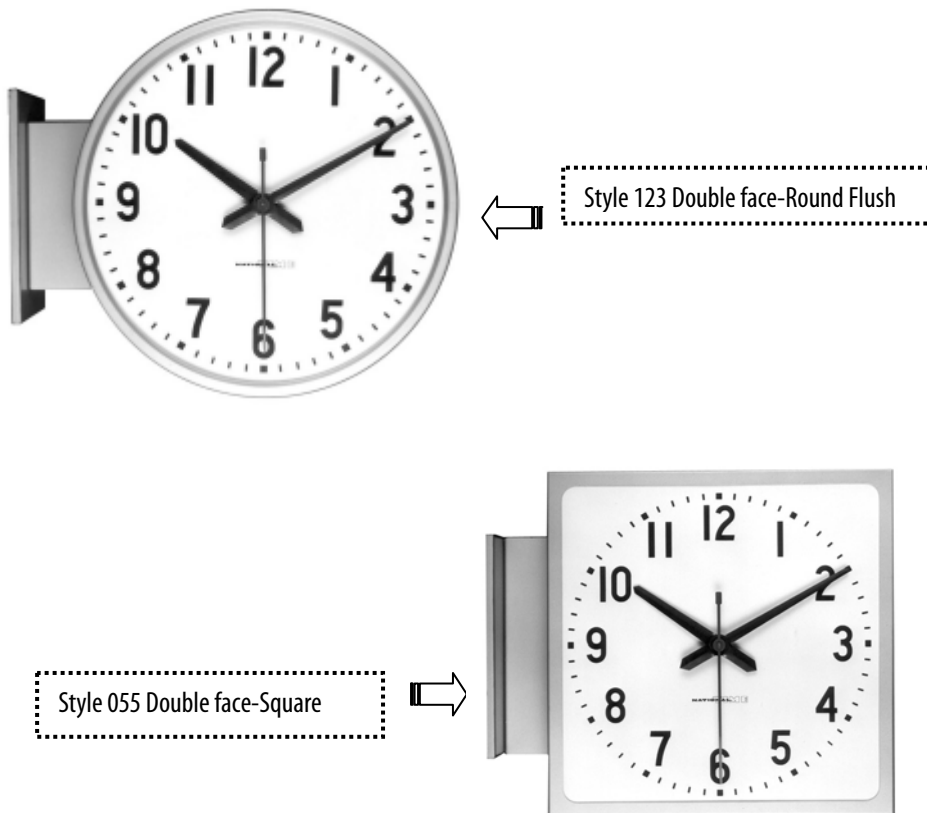


May be Wall or Ceiling Mounted

## Features:

- Synchronous Motor 2-Wire Plug in Clocks
- Synchronous Motor 3-Wire Dual Motor Clock Systems
- Synchronous Motor 3-Wire Electromatic Self-regulating Clock Systems
- Quartz Battery Operated Clocks
- Round or Square
- Wall or Ceiling Mount

## Double Face Electric Clocks

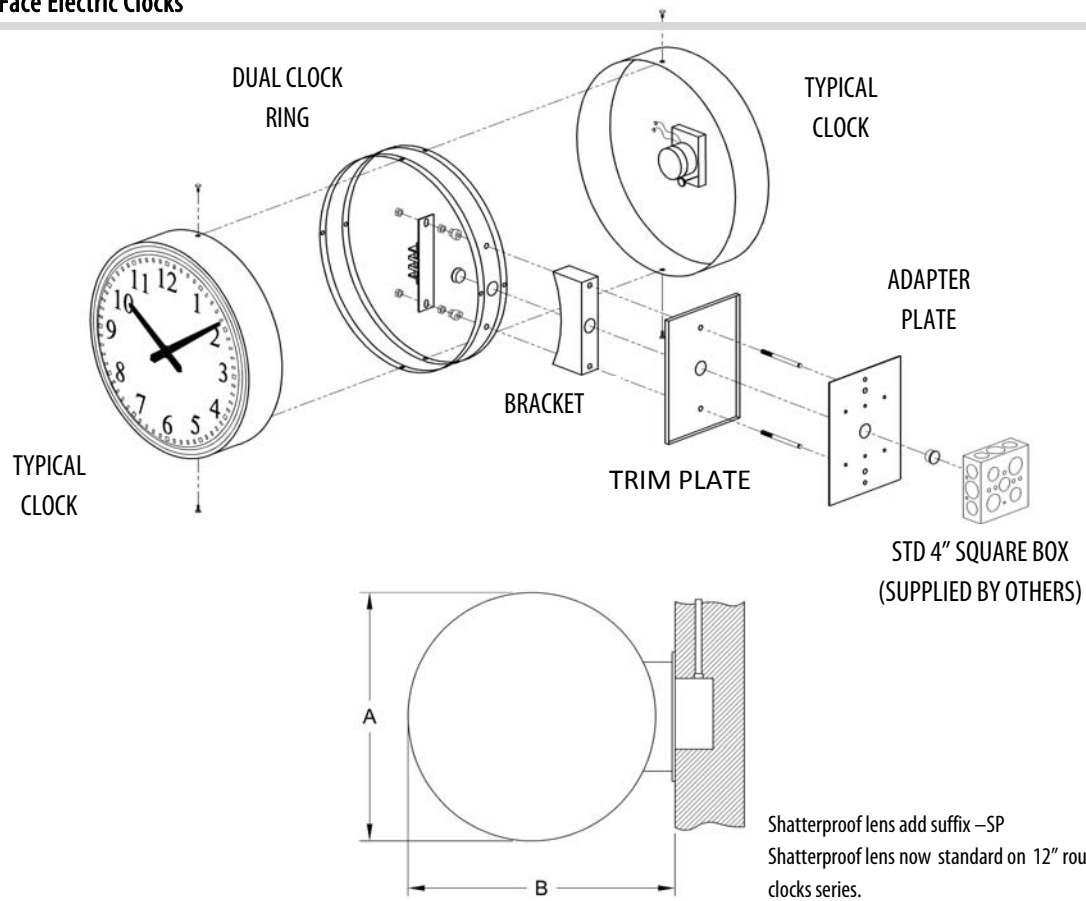

Dial Size	Clock Type No. With Desired Movement				A Outside Diameter	B Clock Projection
	Regular 2- Wire	Self Regulating*	Dual Motor	Quartz Battery		
Round						
10"	123-10	123-10EX	123-10DM	123-10B	11 ¼"	14"
12"	123-12	123-12EX	123-12DM	123-12B	13 ½"	16"
16"	123-16	123-16EX	123-16DM	123-16B	17"	19"
24"	123-24	123-24EX	123-24DM	N/A	24"	26"
Square						
12"	055-12	055-12EX	055-12DM	055-12B	12 ½"	14 ½"

\*Add suffix -LL to EX series for low voltage 24VAC motor and correction coil, add -HH for line voltage (i.e., 123-10EX-HH)  
 For Ceiling mounted clocks, add suffix C (i.e., 123C-12EX-HH).