

The NATIONAL TIME 900 Series Main Control module controls all of the operator interface functions. A 2 line by 40 character LCD displays the panel status, active alarms and troubles, as well as trouble shooting and system configuration data. Five LEDs provide system status at a glance. A 16 button numeric keypad is used to input data and access user friendly menus. Three easy to locate push buttons with LEDs are used for alarm silence, trouble silence and system reset. Also provided are three user programmable push buttons with LEDs which may be customized to activate special functions such as city tie disconnect, drill, page etc. The A900-CTRL MAIN module can also control additional LED annunciators, microphone and telephone zone switches (off/connect), and auxiliary switches (on/auto/off); A900-CTRL ANNUN16, A900-CTRL MIC/TEL, and A900-CTRL AUX8 respectively.

FEATURES

2x40 Character LCD Display

5 Panel Status LEDs

16 Button Keypad

Easy Menu Access


User Friendly

3 User Programmable Buttons

Drives Additional LEDs and Switches

U.L. Listed

Sample Installation

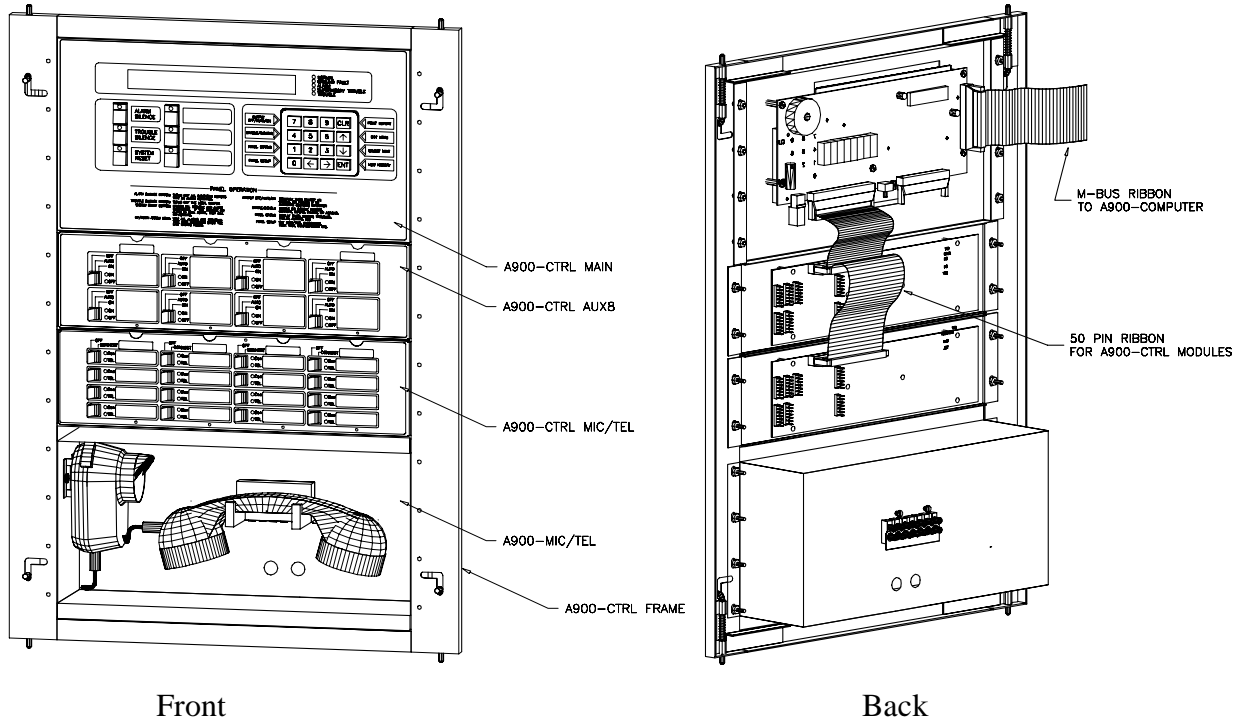

Specifications

Power Input: 24VDC (via M-Bus)

Display: 2 Line by 40 Character Super Twist LCD with backlight

LEDs: Normal, Ground Fault, Alarm, Supervisory, Trouble, and 6 LEDs in Push Buttons

Buttons: 16 Button Keypad, Alarm Silence, Trouble Silence, Reset, and 3 User Programmable

Address Output: Can Drive 128 Input ports, 128 Output ports on A900-CTRL AUX8, A900-CTRL ANNUN16, A900-CTRL MIC/TEL

Terminations: 32 Pin Ribbon (M-Bus), 50 Pin Ribbon to A900-CTRL modules

Finish: Powder Grey

Dimensions: 13"x 7"x 1.25" with mounting ears. Requires 2 A900-CTRL FRAME slots. Frame sold separately

Net Wt.: 2.0 lbs.

Ordering Information

Part No.	Description
A900-CTRL MAIN	MAIN CONTROLS W/ LCD, KEYPAD, 6 BUTTONS, LEDs
A900-CTRL FRAME	PIN HINGE FRAME FOR MOUNTING A900-CTRL MODULES

NATIONAL TIME
& SIGNAL CORPORATION

28045 OAKLAND OAKS CT. WIXOM, MI 48393

PHONE (248) 380-6264 FAX (248) 380-6268