

The NATIONAL TIME 900 Series Class A Adapter Module is used to upgrade Class B supervisory zones to a Class A (Style D,E,Z) zone. The Class A Adapter Module can convert up to 8 zones of *Digi Comm* addressable loops, 24VDC Power Risers or firefighter's telephone risers. Loop Continuity is automatically reestablished after any individual loop is opened. Open and short detection is provided through software control on a per loop basis back to the operator control panel.

FEATURES


Converts 8 Loops from Class B to Class A (Style D,E or Z)

Compatible with *Digi Comm* Loops, 24VDC Power Risers, and Firefighter's Telephones.

Open and Short Detection

U.L. Listed

Wiring Diagrams

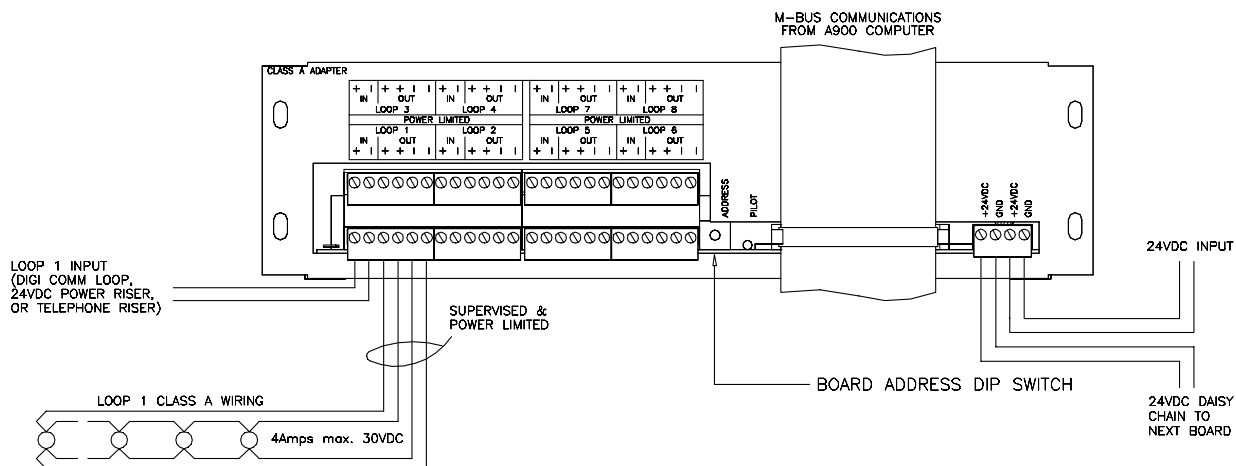

Specifications

- Power Input:** 24VDC regulated, 5VDC via M-Bus
- Outputs:** 8 Loops, Contacts U.L. Rated 4A @ 30VDC
- Terminations:** Removable Screw Terminals. 12AWG 10A
- Finish:** Powder Grey
- Dimensions:** 3"x 10.25"x 4.35" with mounting ears.
Requires 2 rack slots.
- Net Wt.:** 1.55 lbs.

Ordering Information

Part No.	Description
A900-CLASS A ADAPT	CLASS B TO CLASS A LOOP CONVERTER