



The NATIONAL TIME 900 Series Relay 16 Module provides 16 form A (normally open) relay contacts. All relays are individually configured to open or close as a result of any panel input or trouble. Relay Contacts are U.L. Listed 4A @ 30VDC or 5A @ 250VAC. Contacts are not Power Limited or supervised. Contacts are power limited when power source is an A900-POWER, A900-POWERREGEXP, U.L. listed Class II transformer or other power limited source.

FEATURES

16 Form A (SPST) Relay Contacts


Individually Configured

May Be Programmed 'Held Closed' to Simulate Normally Closed Contacts

4A @ 30VDC, 5A @ 250VAC

U.L. Listed

Wiring Diagrams

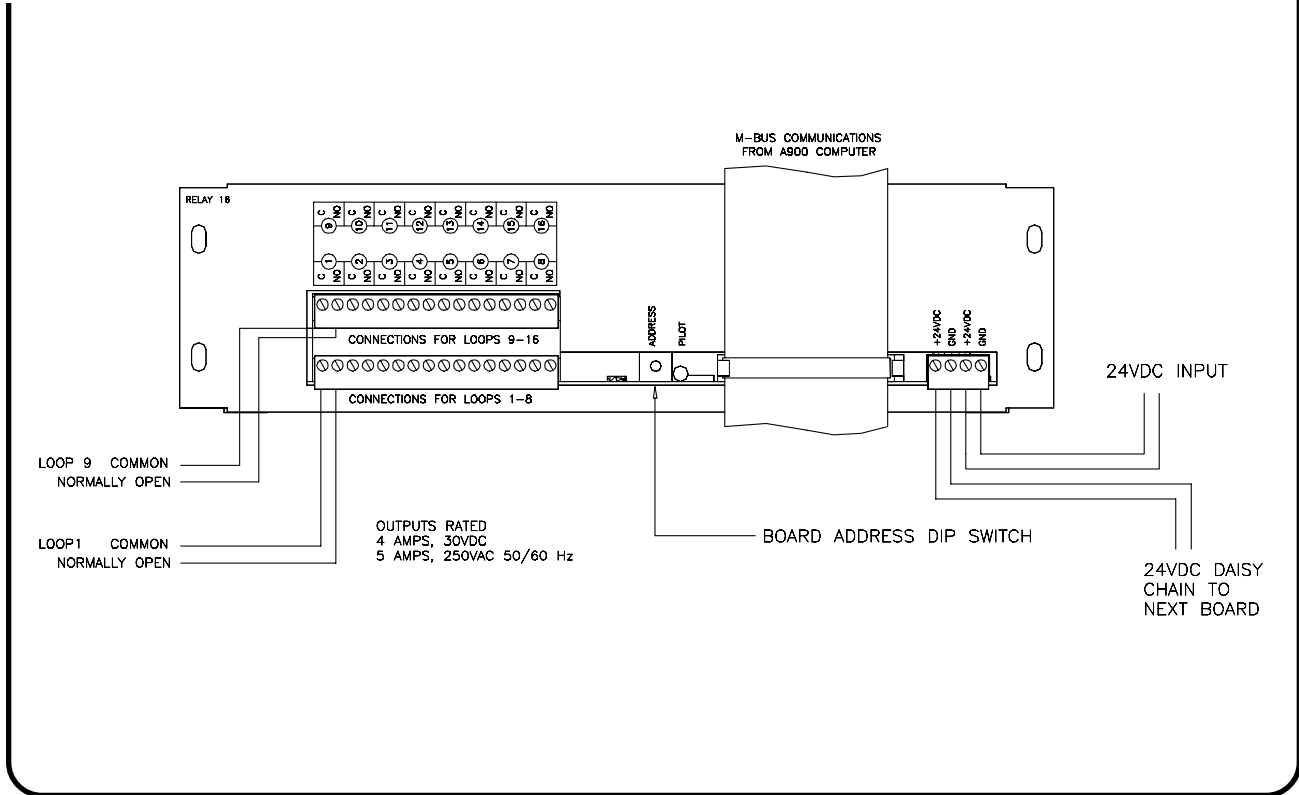

Specifications

- Power Input:** 24VDC regulated, 5VDC via M-Bus
- Outputs:** 16 Relays, SPST Form A, 4A @ 30VDC, 5A @ 250VAC 50/60Hz
- Terminations:** Removable Screw Terminals. 12AWG 10A
- Finish:** Powder Grey
- Dimensions:** 3"x 10.25"x 4.35" with mounting ears.
Requires 2 rack slots.
- Net Wt.:** 1.33 lbs.

Ordering Information

Part No.	Description
A900-RELAY 16	16 SPST FORM A RELAY CONTACTS