

The NATIONAL TIME 900 Series Input 16 Module provides 16 zones of conventional two wire smoke detectors, manual pull stations, and other contact closure devices. Each zone is supervised Style B/C (Class B). Each zone is individually configured to initiate a supervisory or alarm condition, and alarm verification may be selected on a per zone basis. All connections are power limited.

FEATURES

16 Zones of 2-Wire Initiating Devices

Supervised Style B/C (Class B)


Individually Configured Alarm Verification

Programmable for Alarm or Supervisory

Power Limited

U.L. Listed

Wiring Diagrams

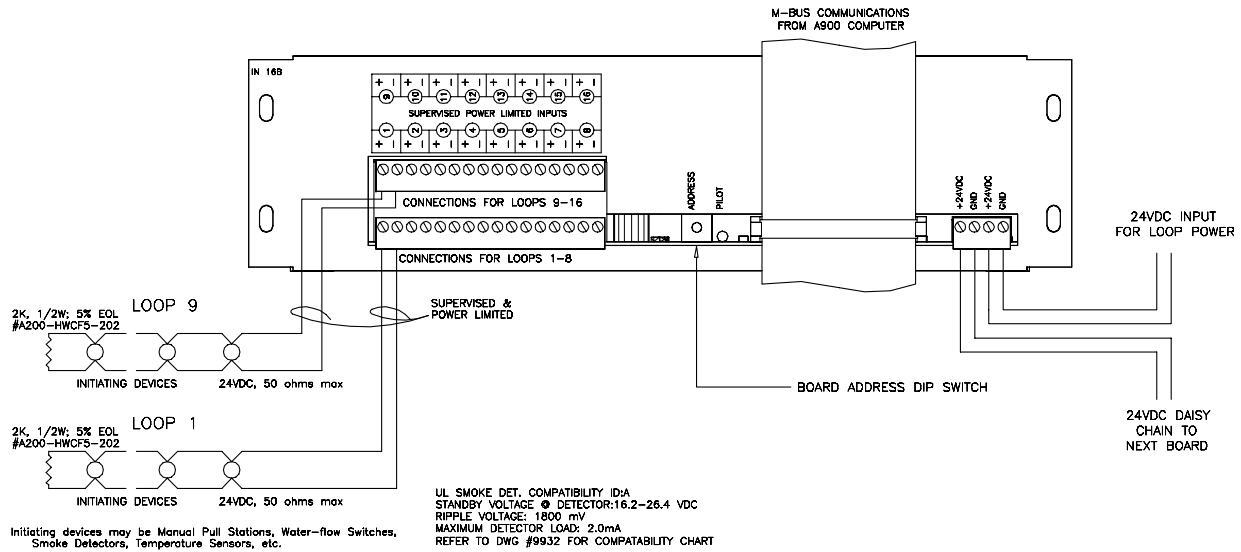

Specifications

- Power Input:** 24VDC regulated, 5VDC via M-Bus
- Inputs:** 16 zones, 24-16VDC power to initiating devices, Power Limited.
Up to 30 detectors per zone (depending on type)
- Loop Resistance:** 50 Ohms max resistance
- Terminations:** Removable Screw Terminals. 12AWG 10A
- Finish:** Powder Grey
- Dimensions:** 3"x 10.25"x 4.35" with mounting ears.
Requires 2 rack slots.
- Net Wt.:** 1.33 lbs.

Ordering Information

Part No.	Description
A900-IN16B	16 INPUT CLASS B (STYLE B/C) SUPERVISION