

The NATIONAL TIME 900 Series Output 6 Module provides 6 zones of supervised outputs. Six 2.5 Amp Power Limited outputs for indicating appliances (i.e. horns, strobes, bells etc.) are provided with Style Z (Class A) or Style Y (Class B) supervision. Outputs may be individually configured for either Class A or Class B supervision. Each output has an electronic fuse protection with auto fuse reset. Power to drive the indicating appliances may be unregulated 24VDC as provided by the A900-Power Expansion module. One indicating device power input supplies 3 of the outputs so that outputs can be powered from two supplies.

FEATURES

6 Outputs, 24VDC 2.5 Amp

Power Limited


Electronic Fuse Protection

Supervised Output
Style Z or Y (Class A or B)

Dual Power Supply Input

U.L. Listed

Wiring Diagrams

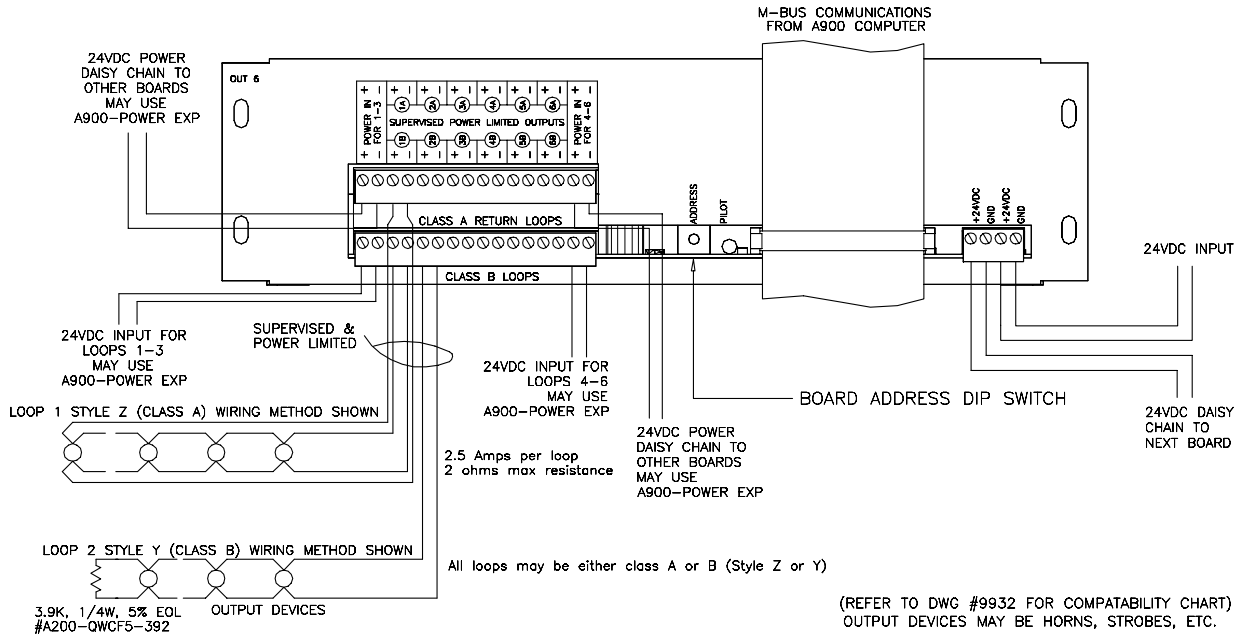

Specifications

- Power Input:** Module Power: 24VDC regulated, 5VDC via M-Bus
For Outputs: 24VDC (may be unregulated)
- Outputs:** 6 Loops, Class A or B, 2.5A each, Power Limited, 2 Ohms max. resistance
- Terminations:** Removable Screw Terminals. 12AWG 10A
- Finish:** Powder Grey
- Dimensions:** 3"x 10.25"x 4.35" with mounting ears.
Requires 2 rack slots.
- Net Wt.:** 1.33 lbs.

Ordering Information

Part No.	Description
A900-OUT6	6 Outputs (2.5A ea.) Style Y or Z (Class B or A) Supervision