



The NATIONAL TIME Addressable Mini Monitor and Mini Priority Monitor modules provide a style B/D initiating input to monitor dry contact initiating devices. The powerful *DigiComm™* communication protocol enables reliable and accurate information to be exchanged between the monitor modules and the Fire Alarm Control Panel. The monitor modules feature programmable status LED indicators. The Mini Priority Monitor Module utilizes the *DigiComm™* communication interrupt protocol to provide faster device response. It is ideal for pull station applications.

FEATURES

Addressable 2 Wire Initiating Circuit

Supervised Style B/D Input

Style 4, 6 or 7 Communication Wiring


Priority Interrupt for Faster Response Time (D900-MINI-P)

Superior *DigiComm™* Digital Communication Protocol

LED Indicator

U.L. Listed

Wiring Diagrams

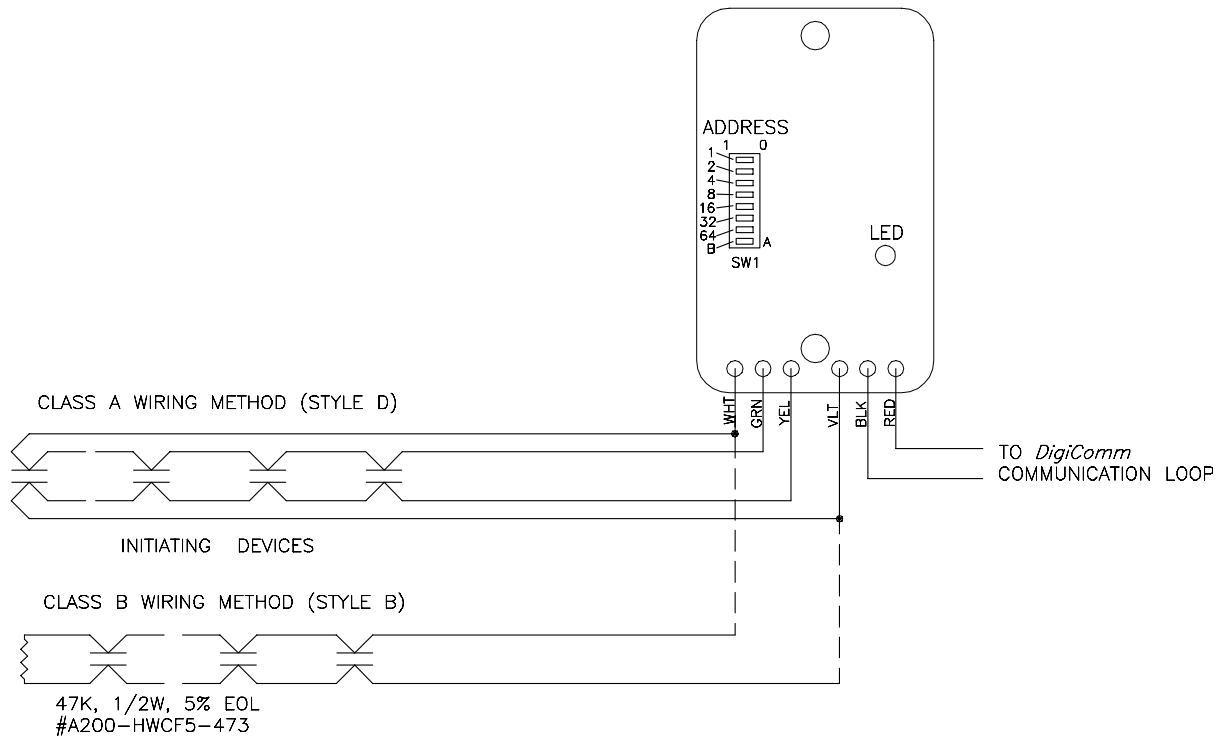

Specifications

Input: Style B/D

Dry Contact Initiating Devices

Max Loop Resistance 50 ohms

DigiComm™ Loop Power: Alarm and Supervisory Currents 600uA (LED Active 5mA)

Communication: Style 4, 6 or 7 (via the *DigiComm™* Communication Loop)

Finish: White Polycarbonate

Dimensions: 1.8" x 3" x .55"

Net Wt.: 1.5 oz.

Mounting: With Pull Station: 4" sq. with Single Gang Plaster Ring

Stand Alone: 4" sq. or octagon, 2 Gang or Deep Utility Box

Ordering Information

Part No.	Description
D900-MINI-P	<i>DigiComm™</i> Mini Priority Monitor Module
D900-MINI	<i>DigiComm™</i> Mini Monitor Module

NATIONAL TIME
& SIGNAL CORPORATION

28045 OAKLAND OAKS CT. WIXOM, MI 48393

PHONE (248) 380-6264 FAX (248) 380-6268