

900 SERIES FIRE ALARM COLOR GRAPHIC DISPLAY

The NATIONAL TIME 900 Series Color Graphic Display A900-PC-CG provides user control and system status identification. The A900-PC-CG is a U.L. listed proprietary receiving unit that connects to the 900/902 Series Fire Alarm Control Panels via the RS232 port on the Fire Alarm Control Panel. All system status points are displayed in a color coded text format that clearly identifies status, operator acknowledgment, point type, location message, time and date. With building or campus map displays, the user can easily identify the location of the emergency as well as surrounding environment details such as egress routes and hazardous material locations. Special instructions can be displayed helping the operator follow prescribed emergency action plans for each alarm point.

The A900-PC-CG provides system operator logon/logoff and multiple access levels with password control. The A900-PC-CG requires an uninterrupted power source to meet U.L. proprietary listing.

The A900-PC-CG is available in an ancillary version (A900-APC-CG) providing many of the features of the standard A900-PC-CG, meeting the U.L. ancillary requirements. Additional building systems such as security, access control, HVAC can be annunciated with custom API's and integration programming. When integrated with National Time's On-Point[™] Central internet portal, remote access to all point information and building maps are available from any PC. Event notifications can be sent via e-mail or text messaging to specified personnel or first responders.




Features:

- Interactive Color Graphic Display
- Control and Status Identification
- Multiple Operator Access Level
- Password Control
- Hard Copy of System Status
- Integrates with On-Point[™] Central
- UL listed
- Proprietary Receiving Unit



Wiring Diagrams

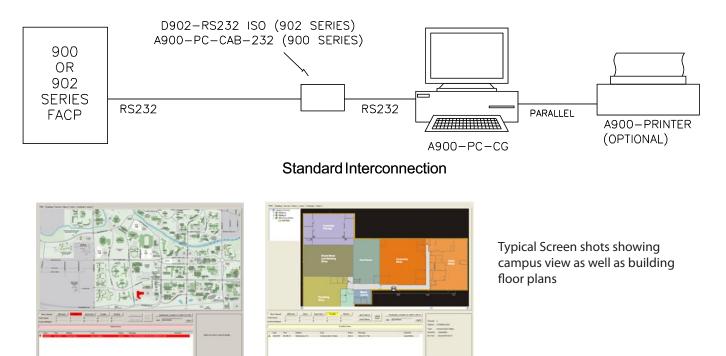

Ordering Information

Model Number	Status	Description
A900-PC-CG	Standard	PROPRIETARY PC, 15 INCH MONITOR, PC KEYBOARD, PC MOUSE
A900-APC-CG	Standard	ANCILLARY PC, 15 INCH MONITOR, PC KEYBOARD, PC MOUSE

Accessories	Status	Description
A900-PRINTER	Optional	SYSTEM PRINTER WITH PARALLEL INTERFACE
A900-MODEM	Optional	RS232 MODEM CONNECTION
A900-RS232/422	Optional	RS232 TO RS422 CONVERTER
A900-FIBER OPTIC	Optional	RS232 TO FIBER OPTIC CONVERTER
D902-RS232 ISO	Optional	RS232 ISOLATOR MODULE (REQUIRED ON 902 FACP AND 902-ANNUN)
A900-PC-CAB-232	Optional	RS232 WIRE ASS'Y (REQUIRED ON 900-FACP)

Specify these options (if any) when ordering: A900-PC-CG-M T P

19" Monitor -

Touch Screen (requires 19" Monitor) -

4 Port RS232 Expansion Module -